

## Version: April2025

**Email: [sales@breezway.com.au](mailto:sales@breezway.com.au)**

## QUOTE

## ORDER

--

\_\_\_\_\_

<b>Date:</b>	<b>Customer Name:</b>	<b>Contact Name:</b>
<b>Required Despatch Date:</b>	<b>Despatch to:</b>	<b>Contact Number:</b>
<b>Customer Order Number:</b>		<b>Transport Method:</b>
<b>Job Reference:</b>		<b>Email/fax:</b>

**Please Note:**

**Special Instructions:**

[illegible]



## User Instructions for Breezway Daylight Opening Quote & Order Form

The Breezway Daylight Opening Quote & Order form is designed to be filled in sequential order. Data entered in earlier cells will change the following cell's available options. This ensures that only compatible selections can be chosen.

If an error is made in entry of a particular row, all cells of that row from 'Clip Type' to the error must be cleared and re-entered.


Frequently used product features (such as 152mm clips over 102mm clips), can be prefilled and saved as default choices.

### Cell Logic

- Selections in row 13 (Cells A13:G13) are used for all openings. Where a job requires multiple clip sizes (102mm and 152mm) an individual form must be submitted for each clip size.
- Clip Colours with an asterisk indicate that the colour is available for Stronghold Clips.
- If Operation (Column E) is selected as Powerlouvre, it will remove any manual specific selections from the following cells, such as handle side or the availability of Security Jamb.
- Selection of Clip Type (Column D) will mean blade type (Column H) will only show options that are compatible with the selected clip type. i.e., Selecting '14mm clips' will only show 'timber' as the blade type.
- Blade Type (Column H) selections will determine what blade colour options are available in Column I.

### Additional Notes

- Daylight Opening is defined as the clear opening or internal opening of a framing system.

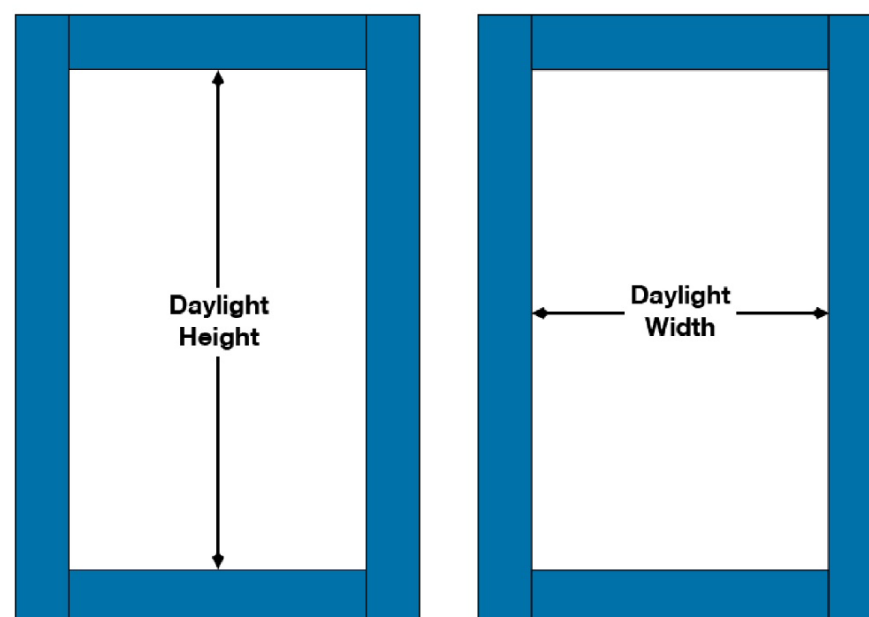

- If "No Weatherstrips" is selected in Column G, then Gallery Heights will be 1mm less than the Daylight Opening.
- If Weatherstrips are selected, then Galleries will be 10mm less than Daylight Height for manual, and 40mm less for Powerlouvre.
- Any sizing conflicts with Stronghold and Powerlouvre dead zones will be communicated by Breezway. These limitations can be viewed using the links in the bottom right corner of the form.





## Altair Louvre Component Checklist

### REQUIRED INFORMATION

- ☐ **Gallery Clip Size**
- ☐ **Gallery Height**  
(Not including weatherstrips)
- ☐ **Gallery Colour**
- ☐ **Clip & Handle Colour**

### OPTIONAL INFORMATION

If no selection is made, default option (indicated in brackets) will be supplied.

- ☐ **Control Side**  
(Left, as viewed from inside)
- ☐ **Screw Holes**  
(Yes)
- ☐ **Handle Type**  
(Standard Handle)
- ☐ **Restricted Opening**  
(No restriction)
- ☐ **Variable Handle Position**  
(Standard handle positions)
- ☐ **Keylock**  
(No)
- ☐ **Stronghold System**  
(No)

### OPTIONAL ACCESSORIES

- ☐ **Weatherstripping (Head & Sill)**  
(Required for Product Performance Warranty)
- ☐ **Backing Strip**  
(Allows installation without visible screws)
- ☐ **Map Rod**  
(For operation of out of reach handles)
- ☐ **Security Jamb**  
(For security bars with no visible screws - must be installed with galleries and weatherstrips)
- ☐ **Security U-Channel**  
(For security bars with visible screws - can be installed after galleries and weatherstrips)
- ☐ **Powerlouvre Transformer**  
(Provides 24v DC current to Powerlouvre motors)